
UNI-SHOP GUIDE

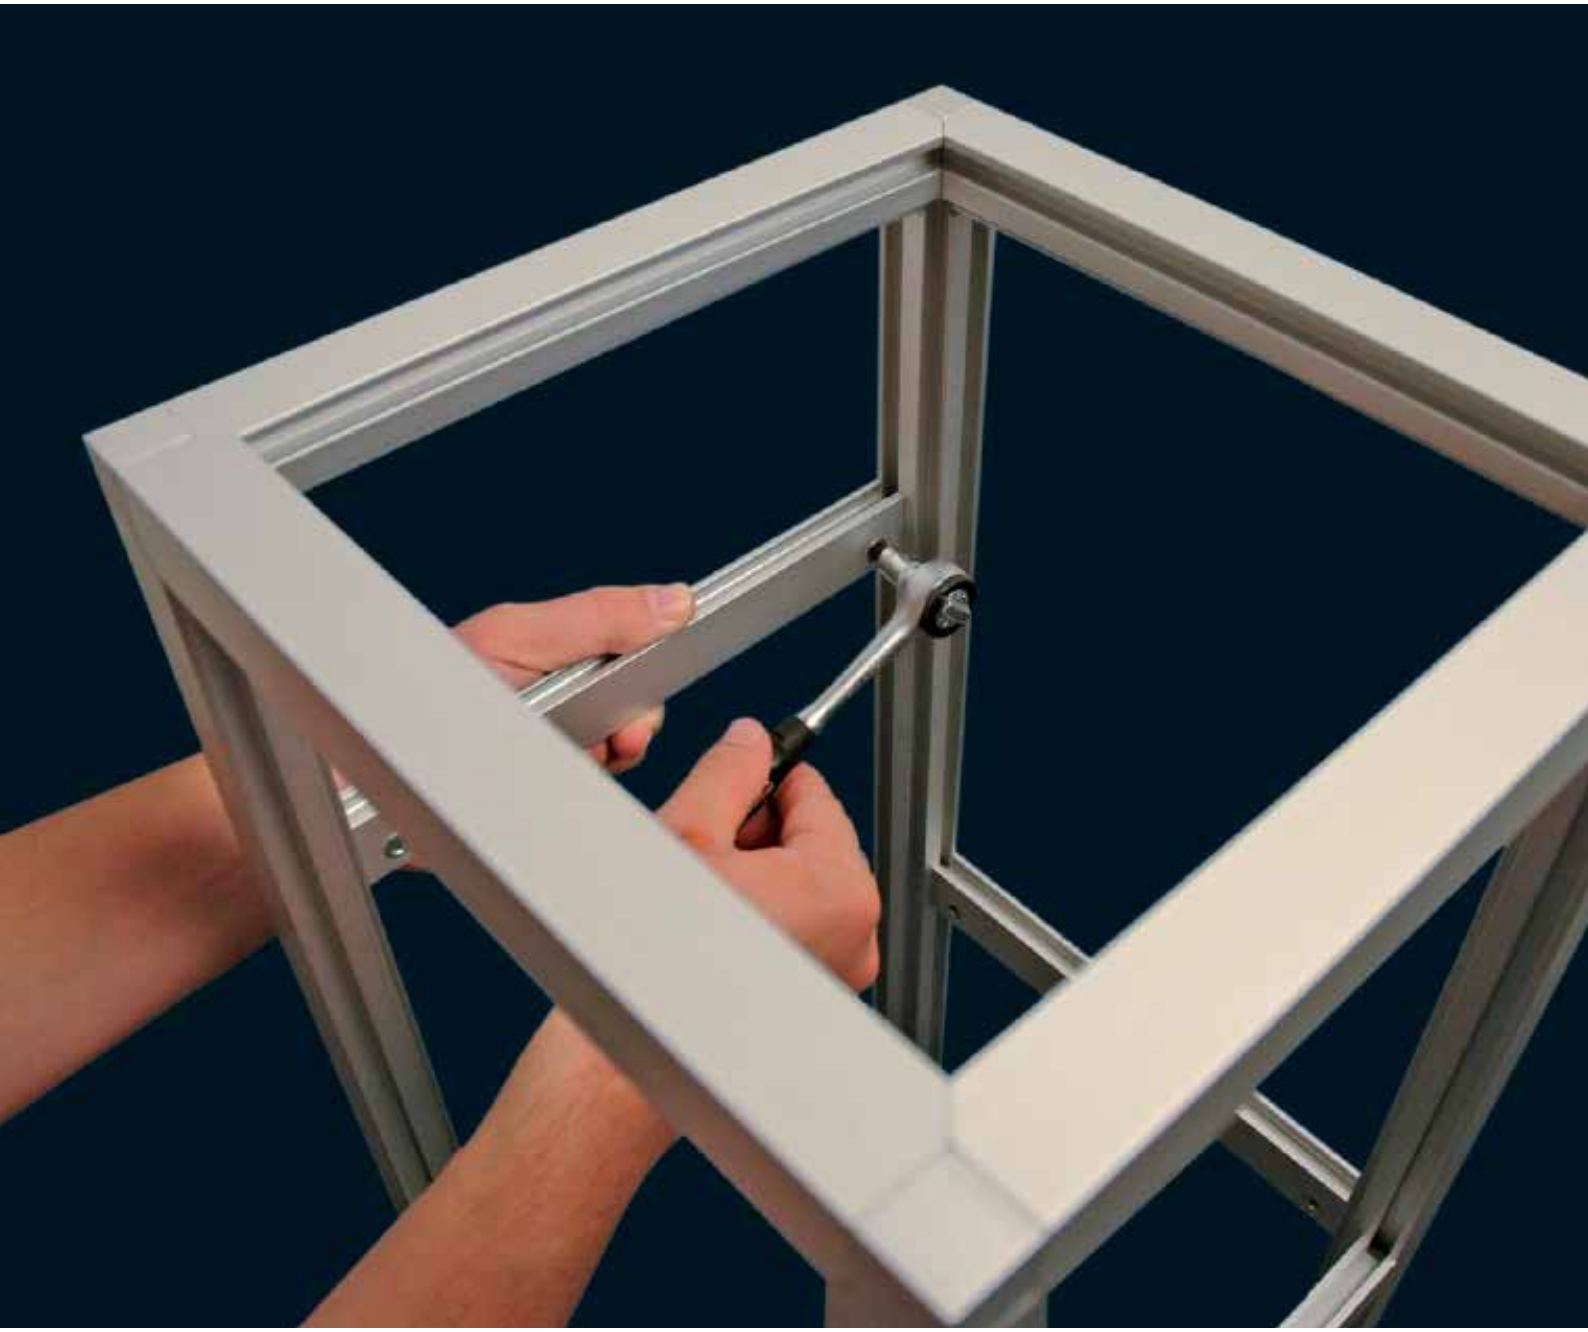

WORKING WITH
UNI-SHOP AND SELECT


SYSTEM STANDEX®

Standex UniShop comprises the following components

NOTE!
The starting point for all dimension calculations is the outer measurements (L_1 og H_1) of the counter or vitrine.
With oblique angles, the dimensions are calculated according to the theoretical corners
- where the extensions of the sides intersect, e.g.:


Rounded corner profiles

90° corner




RC 44 - 2 R

135° corner



RC 44 - 3 R

120° corner



RC 44 - 6 R

Accessories

90° end cap



US 6

90° end cap for adjustable foot




US 6 G M8

Connector plug for glued assemblies



PH 44 - 3R

Screw fitting for PH44-3R assembly without adhesive



US 20

135° end cap



US 3

135° end cap for adjustable foot



US 3 G M8

120° end cap



US 11

120° end cap for adjustable foot



US 11 G M8

Adjustable foot



D7 M8

Adjustable foot



D9 M8


Fitting for connection of two corner profiles



US 21

Corner profile

90° Corner



RC 44 - 2

Assembly sections for RC 44-2 profiles, 20 mm




Type P and SE

RC 44-2 combines Standex Unishop and Standex constructional systems. See special brochure.


Rounded profiles for top and bottom

Large profile for 10 mm plate




RC 44 - 5 R10

Large profile for 20 mm plate




RC 44 - 5 R20

Small profile for 10 mm plate



RC 36 - 5 R10


Small profile



RC 36 - 1R


Intermediate profiles

Vertical or horizontal intermediate profile




RC 44 - 5

Vertical or horizontal intermediate profile




RC 36 - 8

Vertical or horizontal intermediate profile



RC 36 - 5

Vertical int profile for



RC


Calculating the length of the profiles





Calculating the size of the panels




Length and width













Height







Position of holes for connector screw







Top panel











Fitting side panel

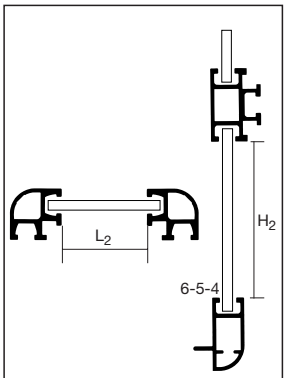

Panel sizes:
6 mm: L_2 + 14mm x H_2 + 14mm (inserted without gasket)
5 mm: L_2 + 12mm x H_2 + 12mm (inserted with gasket PL1)
4 mm: L_2 + 9mm x H_2 + 9mm (inserted with gasket GU1)

Fitting top glass



Connectors

Connector for RC 44 profiles



PC 44 - 5

Connector for glued assemblies without corner profiles



I 44 - A

Connector for glued assemblies without corner profiles



I 44 - 5 90°

Connector for glued assemblies without corner profiles




I 44 - 5 120°

Connector for glued assemblies without corner profiles




I 44 - 5 135°

ermediate partition wall



36 - 3

Vertical or horizontal intermediate profile



RC 36 - 1

Connector for RC 36 profiles



PC 36 - 5

Guide for RC 36 profiles



36 M

Connector for glued assemblies without corner profiles




I 36 - A

Screw for connector




Cover plug for connector screw



US 22


Supplementary profiles

Profile for connection to other materials



C 16 - 10

Cover profile



RC 40 - D

Profile for supporting shelves or lighting units



L 10 - 2




Bottoms and intermediate panels





Shelves


Connection with PH 44 - 3R

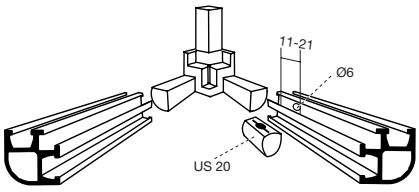



Assembly with adhesive or assembly with fittings US 20






















Sliding doors

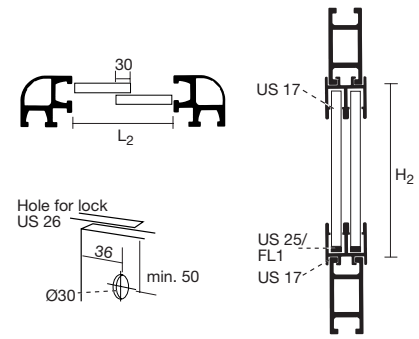

Width:
Both doors the same size: $\frac{L_2}{2}$ + 15 mm

Height:	Thickness: ≤ 5 mm	6 mm
With fibre strip FL 1:	H_2 –10 mm	
With roller US 25:	H_2 –15 mm	H_2 –24 mm

Hinged doors

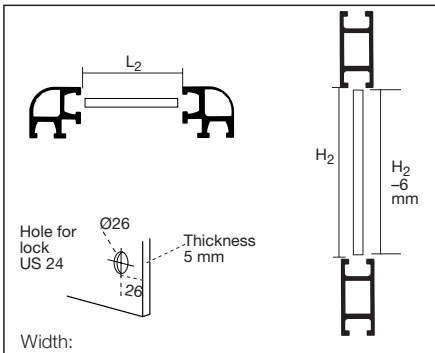

Width:
Hinge US 14: L_2 –6 mm
Hinge US 28: L_2 –4 mm

Fitting the panels

Glass gasket for 5 mm (and 6 mm) glass



PL 1

Glass gasket for 4 mm (and 5 mm) glass



GU 1

Panel holder



US 23

Shelf supports

Shelf support for wooden shelves (for corner profiles)



US 18

Shelf support for glass shelves (for corner profiles)



US 18 G

Shelf support for wooden shelves (for T-groove)



US 19


Shelf support for T-groove. 150, 200, 250 and 300 mm



US 27...mm

Sliding doors

Profile for sliding doors



US 17

Lock for sliding doors



US 26

Fibre strip for sliding doors



FL 1

Roller for sliding doors



US 25

Hinged doors

Hinges for glass door (set)



US 14

Lock for hinged glass door



US 24

Hinges with pin for glass door (set)



US 28

Stop for glass door (90°, 60°, 120°, 135°)



US 15...°

Stop for double door




US 29

STANDEX SELECT NOTICEBOARD

A well-thought-through constructional system for the manufacture of noticeboards.
Select noticeboards with a depth of either 100 mm or 52 mm.

Frame profile




RC100-R20

Frame profile




RC52-R20

Door profile



RC36-5

Door profile





RC 44-5


Hinge




500-816-17

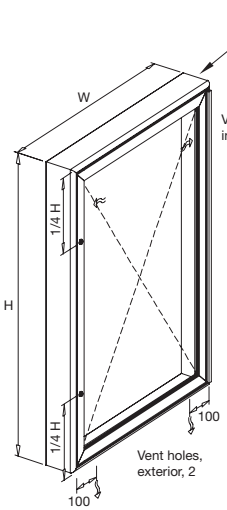


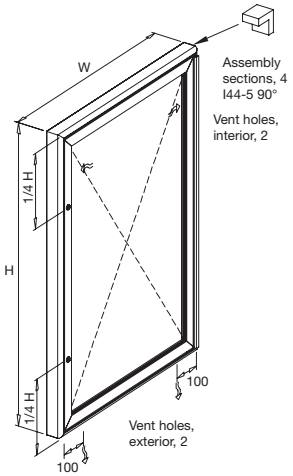

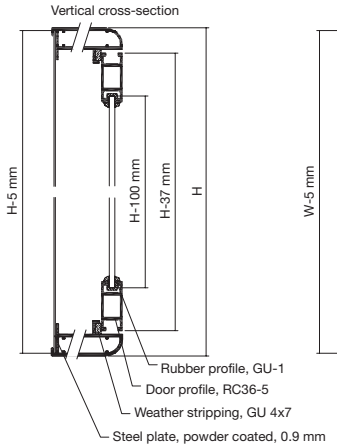


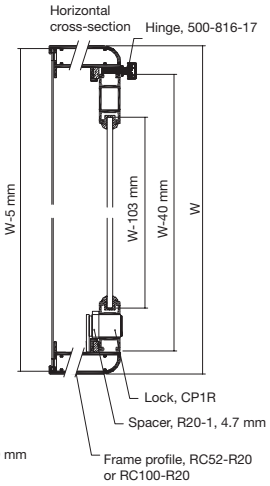

Ventilation and holes for suspension in frame

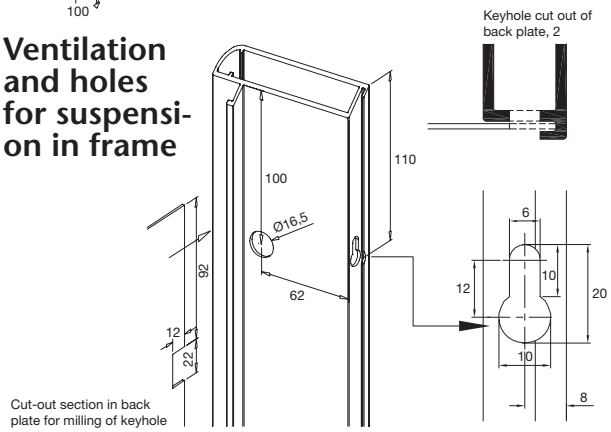

Drain and installation of hinges and lock in door

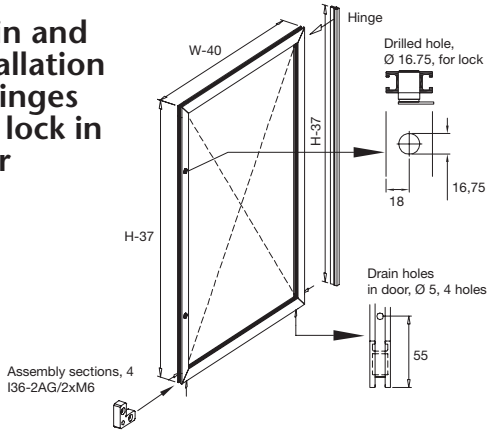

Assembly sections for case

Glued joints 52,5 mm



I 44 - 5 90°

Assembly sections for door

Glued joints 50 mm



I 44 - 2A

Joints with screws 50 mm



I 44 - 2AG/2xM6

Weather-proofing

Rubber profile, self-adhesive



GU4x7

Lock

Lock



CP1R

Glued joints 100 mm



I 100 - 2

Glued joints 36 mm



I 36 - 2A

Joints with screws 36 mm



I 36 - 2AG/2xM6

Inserted glass



GU-1

Spacer (lock included)



R20-1 4.7 mm

DESIGN USING SYSTEM STANDEX

Standex UniShop is a flexible system which can be used to design shopfittings in almost any form imaginable. It offers you the potential to resolve solutions which are adapted to the needs of your customers. As a result, Standex UniShop gives you an excellent foundation for satisfying your customers and running a successful business.

When it comes to presentation, the sky's the limit. In the majority of cases, it is simple to work out how the constructions should be designed. Available is a profile and component specification sheet that you can work with, as well as giving instructions on how to shorten the profiles so that the dimensions of the finished fittings match your requirements.

In principle, a solution almost always consists of vertical corner profiles, horizontal profiles for top and bottom, as well as any intermediate profiles required.
In the drawings, we show how to calculate dimensions for cutting profiles in relation to the finished external dimensions. We then show how to calculate the sizes of the top and side plates, as well as of shelves and partitions. Finally, we give instructions on various types of door.

If you are in any doubt about the details, please feel free to contact System Standex.

SYSTEM STANDEX®
System Standex A/S
Herluf Trolles Vej 140
DK-5220 Odense SØ
Tel. +45 66 15 66 15
Fax +45 66 15 55 48
info@system-standex.dk

www.system-standex.dk